




Product Information

GP-675 ABA SILICONE POLYOL COPOLYMER

(CAS No. 151662-01-0)

Genesee Polymers' *GP-675 ABA SILICONE POLYOL COPOLYMER* is a 100% active non-ionic silicone polyol block copolymer with the structure below:

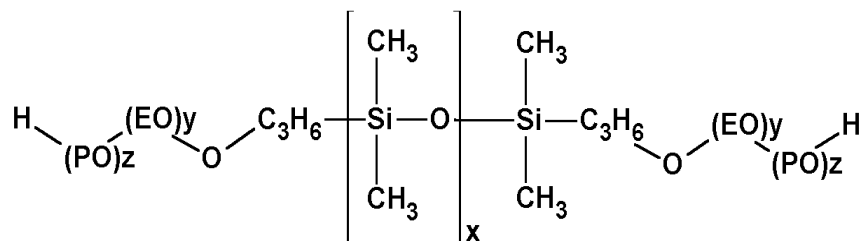

(y and z are random)

GP-675 contains polyoxyethylene-polyoxypropylene copolymer blocks and dimethyl silicone polymer blocks, which are joined through non-hydrolyzable silicon to carbon bonds.

GP-675 ABA SILICONE POLYOL COPOLYMER is designed to function as an emulsifier, wetting agent and profoaming additive for a variety of applications including: polyurethane foams, hard surface cleaners and polishes and cosmetic formulations. *GP-675* exhibits inverse solubility versus temperature characteristics, becoming insoluble in water as temperature is increased to approximately 40° C (104° F). This property suggests use as a defoamer for hot aqueous surfactant solutions.

INNOVATIVE POLYMER TECHNOLOGY

TYPICAL PROPERTIES	
Appearance	Clear to Slightly Hazy, Colorless to Amber Liquid
Weight/Gallon	8.5 lbs
Viscosity 77° F	3000 cP
Flash Point (P.M.C.C.)	>300° F
Specific Gravity	1.05
% Active	100%
% Silicone	63%
Molecular Weight	7,970 (Calculated)
Polyol Type	Polyoxyethylene-Polyoxypropylene (EO/PO)
Solubility in Water	Forms Emulsion
Freezing Point	-50° F

APPLICATIONS
Pigment Dispersant
Glass Cleaner Ingredient
Wetting Agent
Shampoo Additive
Thread Lubricant
Polyurethane Foam (Cell Control Agent)
Leveling and Flow Control Agent
Profoaming Additive (Aqueous

Systems)



SPECIAL FEATURES
Low Surface Tension
Water Dispersible
Non-Hydrolyzable
Low Freeze Point

PROCESSING AND SAFETY GUIDELINES

GP-675 ABA SILICONE POLYOL COPOLYMER has a very low order of toxicity, but should still be handled with all precautions common to the use of any industrial chemical product.

For additional information refer to Safety Data Sheet.

PACKAGING/HANDLING/STORAGE

GP-675 ABA SILICONE POLYOL COPOLYMER is supplied in 5-gallon (40 lbs.) pails, 55-gallon (465 lbs.) drums and 330-gallon (2790 lbs.) totes.

Moisture Sensitive. Keep containers tightly sealed. Store below 100° F.



This information is based on tests believed to be reliable. It is given only for your information and no warranty, express or implied, is made as we cannot guarantee the test conditions not under our direct control. This data is not intended as authorization or recommendation to practice a patented invention without knowledge or permission of the patent owner.