




Product Information

GP-678 SILICONE FLUID

Genesee Polymers' *GP-678 SILICONE FLUID* is a hydrogen-terminated dimethyl polysiloxane with a nominal viscosity of 35 cSt at 25° C with the following structure where x = 25:

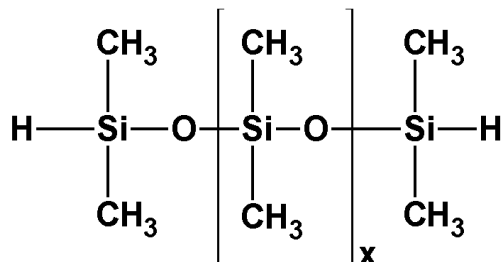

The silicon - hydrogen groups of *GP-678* provide a reactive site, allowing reaction with a variety of materials containing vinyl groups or with hydroxyl functional polysiloxanes in combination with heat or metal catalysts.

INNOVATIVE POLYMER TECHNOLOGY

TYPICAL PROPERTIES	
Appearance	Clear, Colorless Liquid
Weight/Gallon	8.0 lbs
Specific Gravity	0.97
Refractive Index	1.4050
Viscosity, 25° C	35 cSt
% Silicone	100%
Molecular Weight	2,000 (Calculated)

APPLICATIONS
<p>Room Temperature Curing Silicone Rubber Component</p> <p>Hydrophobic Treatment of Powders and Pigments</p> <p>Water Proofing Agent for Textiles, Paper and Leather</p> <p>ABA Type Silicone Block Copolymers</p>



PROCESSING AND SAFETY GUIDELINES

Genesee Polymers' *GP-678 SILICONE FLUID* reacts with water, alcohols or other reactive hydrogen compounds, to liberate hydrogen gas. Since the hydrogen is Flammable and also will cause pressure build-up in closed containers, use all proper precautions when handling these products.

Alkaline materials will cause a rapid release of hydrogen, when in contact with *GP-678*, and must be avoided.

GP-678 SILICONE FLUID may cause skin irritation. Consult Safety Data Sheet for additional safety information.

PACKAGING/HANDLING/STORAGE

GP-678 SILICONE FLUID is supplied in 5-gallon (40 lbs.) pails, 55-gallon (440 lbs.) drums and 330-gallon (2640 lbs.) totes.



www.gpcsilicones.com

This information is based on tests believed to be reliable. It is given only for your information and no warranty, express or implied, is made as we cannot guarantee the test conditions not under our direct control. This data is not intended as authorization or recommendation to practice a patented invention without knowledge or permission of the patent owner.