


GP-695 SILICONE FLUID

Genesee Polymers' *GP-695 SILICONE FLUID* is an epoxy functional dimethylpolysiloxane copolymer fluid with the following structure where x=52 and y=3.5:

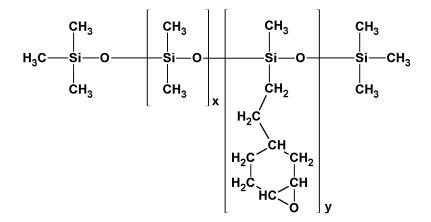

INNOVATIVE POLYMER TECHNOLOGY

TYPICAL PROPERTIES	
Appearance	Clear to Slightly Hazy, Colorless to Light Straw Liquid
Weight/Gallon	8.0 lbs
Flash Point (P.M.C.C.)	>300° F
Refractive Index	1.4180
Viscosity @ 25° C	350 cP
Specific Gravity	0.99
Epoxy Equivalent Weight	1300 gms

APPLICATIONS

GP-695 SILICONE FLUID is suggested for use as a reactive silicone intermediate in the synthesis of organosilicone copolymer products.

The epoxy functionality provides a site for reactions with alcohol, acid and amine functional monomers, allowing the synthesis of a variety of organo-functional silicones.

PACKAGING/HANDLING/STORAGE

GP-695 SILICONE FLUID is supplied in 5-gallon (40 lbs.) pails, 55-gallon (440 lbs.) drums and 330-gallon (2,640 lbs.) totes.

Moisture Sensitive. Keep container tightly sealed. Store below 100° F.



This information is based on tests believed to be reliable. It is given only for your information and no warranty, express or implied, is made as we cannot guarantee the test conditions not under our direct control. This data is not intended as authorization or recommendation to practice a patented invention without knowledge or permission of the patent owner.